


Dartboard Dimensions

Regulation board -- rings, bulls and number order (WDF / PDC)

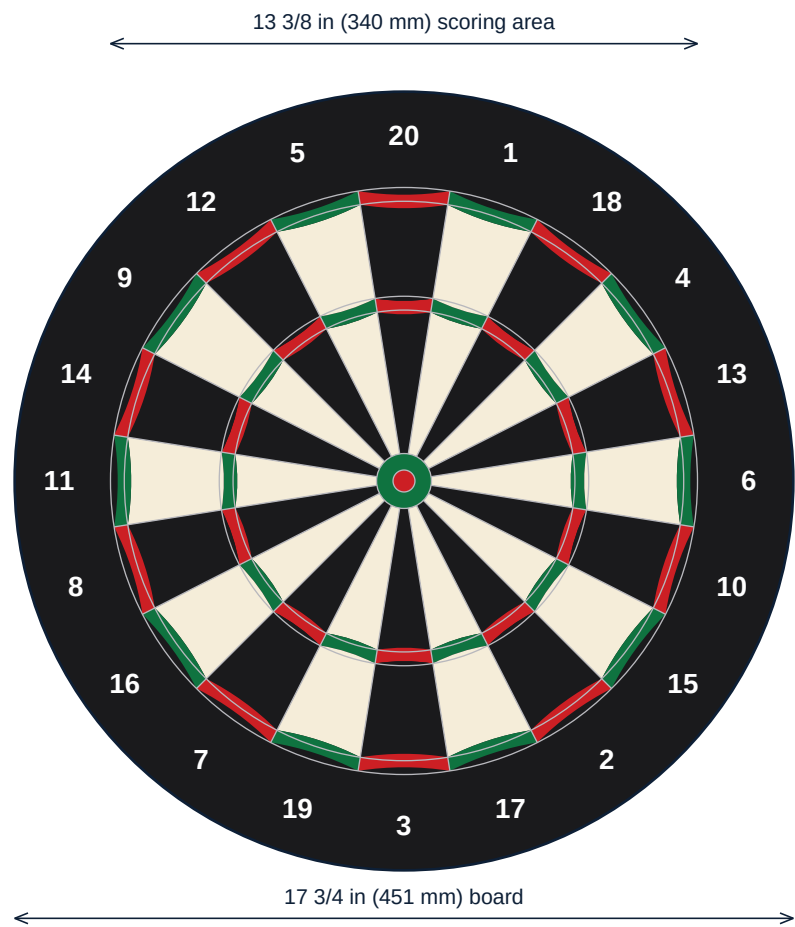

Ring / spot	From the bull	Width
Inner bull (50)	0 - 6.35 mm	12.7 mm across
Outer bull (25)	6.35 - 15.9 mm	31.8 mm across
Inner single	15.9 - 99 mm	
Treble ring	99 - 107 mm	8 mm
Outer single	107 - 162 mm	
Double ring	162 - 170 mm	8 mm
Scoring area	340 mm across	13 3/8 in
Board edge	225.5 mm	451 mm / 17 3/4 in

Numbers clockwise from the top:
20 1 18 4 13 6 10 15 2 17 3 19 7 16 8 11 14 9 12 5

Each sector is 18 degrees. The 20 sits at the top on the vertical centre line; the high numbers are flanked by low ones (20 between 1 and 5) so a miss is punished.

Board: 451 mm (17 3/4 in) across overall; scoring area 340 mm (13 3/8 in) to the outside of the double wire. Double and treble rings 8 mm wide; outer bull 31.8 mm, inner bull 12.7 mm across

Hang it with the centre of the bull 5 ft 8 in (1.73 m) off the floor and the 20 at the top -- the mounting screw is usually about 8 1/2 in higher, but measure your bracket

Throw line (oche): 7 ft 9 1/4 in (2.37 m) from the face of the board for steel tip, 8 ft (2.44 m) for soft tip; the bull-to-oche diagonal of 9 ft 7 3/8 in (2.93 m) checks both at once

Steel-tip darts may be up to 30.5 cm and 50 g (WDF); soft-tip leagues cap darts at about 8 in and 18-20 g. Allow a 5-ft-wide lane and 3-4 ft behind the line